

Large-Screen LCD

Orchestrating a brighter world

NEC

55", 50" and 43" Commercial Displays Ideal for Digital Signage Applications

MultiSync[®] C551 / C501 / C431



Create maximum visual impact through seamless simplicity with the new professional NEC C-series products.

Contemporary and slim mechanical design with focused aesthetics allows for smooth and stylistic integration into any type of environment. The NEC C-series boasts 400 cd/m² brightness along with a new anti-glare surface that allows for efficient readability in normal ambient light situations and 24/7 applications are possible.

Highlights

Modern and Slim Design

The new elegant slimline design provides unobtrusive integration into any application and environment. The simplicity of its shape supports an unhindered viewing experience ensuring that the screen content is the prevalent factor. Its reduced depth means that access to buildings and integration within interior design is straightforward and hassle-free.


Blue ON LED and Ambient Light Sensor

New mechanical structure allows for sleeker LED and ambient light sensor design. Auto dimming of the LED backlights can be utilized through the ambient light sensor allowing the brightness to change depending on the external lux in the room of installation.




Key Guide

New Key Guide function allows for easier access to buttons when manually controlling the unit via the buttons on the back of the display by adding a graphic on the screen that directs the customer to the correct button location in both landscape and portrait modes.

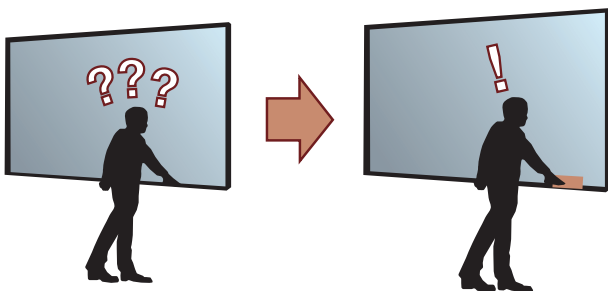

The Media Player Function can Play and Display Movies and Images Saved on a Storage Device

By connecting a USB storage device or microSD memory card containing video data and image files, videos and images can be presented without a computer. This means that digital photos, videos, and music that teachers and students have recorded can be used in the classroom without disrupting the flow of the class. The display can also be used to display information and background videos in reception lobbies, lounges, waiting rooms, and other areas.

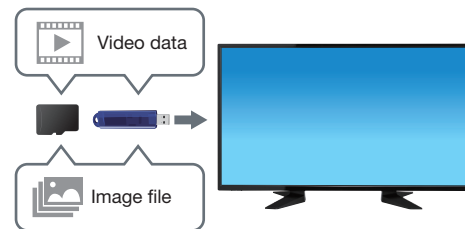

Data formats supported

Supported file systems	FAT16 / FAT32
Image data format	JPEG, PNG
Video data format	MPEG1, MPEG2, H.264, WMV
Audio data format	LPCM, MP3, (AAC, WMA in video file)

* For details, see the website or the user's manual.

Built-in High-output 10 W + 10 W Stereo Speakers for Convenient Audio Playback

The built-in 10 W + 10 W stereo speakers can play audio signals from various video devices at a high volume to deliver clear sounds to a room.

Equipped with a Powered USB Port

The display is equipped with a powered USB port of 5 V / 2 A. Power can also be supplied to USB power-supply devices.

Supports Portrait Installations Suitable for Digital Signage

The display itself can be installed vertically, which widens the range of practical uses to include signage, such as signs and electronic guidance boards in public areas. In addition, the bezel width is symmetrical around the screen, and a function is included to rotate the settings menu projected on the display, so the display can be used without it feeling out of place.


NaViSet® Administrator 2

This software is an all-in-one remote support solution that runs from a central location and provides monitoring, asset management and control of the majority of NEC display devices and Windows computers. It is ideal for multi-device installations over larger infrastructures.





Removable Logo

When mounting from Landscape to Portrait orientation, there is now the ability to change the orientation of the logo or remove it all together

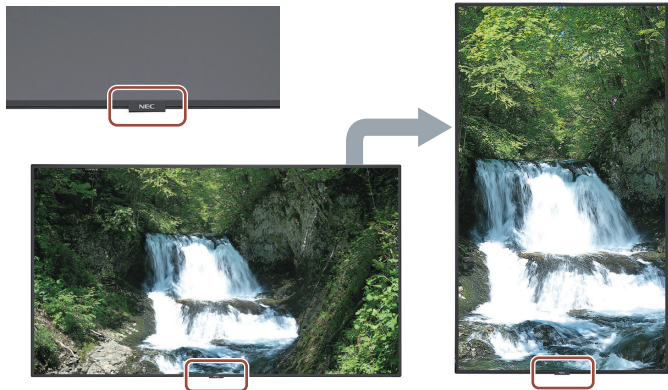

L-Shaped Connectors

Connectors are located on both the bottom and side of the display to allow for easy access regardless of orientation.

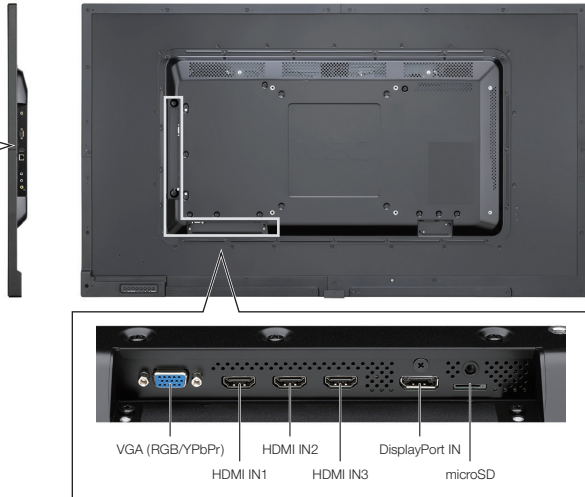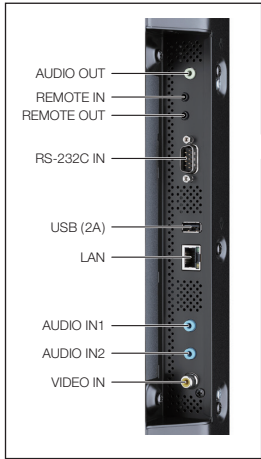

Other Useful Features and Functions


- Fan-less silent design
- Scheduler with real-time clock
- Intelligent power management system
- Screen saver function
- Aspect ratio control
- Memo function
- Carbon footprint metre
- Point zoom
- Control lock function
- 6-axis colour adjustments and sRGB standard
- Advanced video settings (Noise reduction, adaptive contrast)
- Colour temperature adjustment
- Tile matrix, tile comp
- Power-on delay
- Remote control ID
- Plug and play (DDC/CI, DDC2B)
- HDCP (High-bandwidth Digital Content Protection)
- Ethernet and RS-232C control and communication
- CRESTRON ROOMVIEW™
- AMX Discovery HTTP server
- PjLink
- SNMP (Simple Network Management Protocol)
- HDMI CEC (Consumer Electronics Control)
- Firmware update over LAN
- Rear metal cabinet with VESA Standard (FDMIv1) Mounting Interface



Specifications

MODEL	C551	C501	C431
LCD MODULE			
Viewable size (diagonal)	55"/ 1,387.8 mm	50"/ 1,257.3 mm	43"/ 1,079.5 mm
Active screen area (W x H)	1,209.6 x 680.4 mm	1,095.8 x 616.4 mm	940.9 x 529.3 mm
Panel technology	VA		
Native resolution	1,920 x 1,080		
Brightness (factory setting / maximum)	280 / 400 cd/m ²		
Contrast ratio (typical)	4,000:1 (Native contrast)		
Viewing angle [°]	178 horizontal / 178 vertical (at CR>10)		
Response time (typical)	8 ms (G to G)	6.5 ms (G to G)	8 ms (G to G)
Backlight	Edge LED backlight		
CONNECTIVITY			
Input terminals	DisplayPort	DisplayPort x 1	
	HDMI	HDMI x 3	
	VGA	Mini D-sub 15 pin x 1	
	Video	RCA x 1	
	Audio	Digital: HDMI x 3, DisplayPort x 1, Analogue: 3.5 mm stereo mini jack x 2	
Output terminal	Audio	3.5 mm stereo mini jack x 1	
External control	RS232C	D-Sub 9 pin x 1	
	Ethernet	RJ-45 10BASE-T / 100BASE-TX x 1	
	Remote in	3.5 mm stereo mini jack x 1	
	Remote out	3.5 mm stereo mini jack x 1	
USB port	USB Type A, Power supply port 5V / 2A (max.)		
SD card slot	micro SD card x 1, Up to 32GB microSDHC is supported		
Speaker output	Internal speakers	10 W + 10 W	
POWER			
Power requirement (100 – 240 V)	1.55 – 0.65 A	1.50 – 0.60 A	1.35 – 0.55 A
Power consumption (typical)	75 W	65 W	50 W
Power consumption (Network standby mode)	2.0 W		
Power consumption (Normal standby mode)	0.5 W		
PHYSICAL SPECIFICATIONS			
Bezel width (L/R, T/B)	12.4 mm		
Dimensions (without stands: W x H x D)	1,238.4 x 709.2 x 45.0 mm	1,124.7 x 645.3 x 45.0 mm	970.7 x 558.9 x 45.0 mm
Dimensions (with stands: W x H x D)	1,238.4 x 742.0 / 762.0 x 267.7 mm	1,124.7 x 685.3 x 267.7 mm	970.7 x 594.7 x 267.7 mm
Packaging dimensions (W x H x D)	1,430 x 920 x 250 mm	1,300 x 848 x 220 mm	1,136 x 704 x 172 mm
Net weight (without stands)	18.8 kg	16.1 kg	12.5 kg
Gross weight (with box)	27.1 kg	23.0 kg	17.5 kg
VESA compatible mounting interface	300 x 300 mm (M6, 4 holes)		
Supported orientations	Landscape, Portrait		
ENVIRONMENTAL CONDITIONS			
Operating temperature	0°C to 40°C		
Operating humidity	20% to 80% (without condensation)		
ADDITIONAL FEATURES			
Operating hours	24 / 7		
Sensor	Ambient light sensor	Integrated, triggered actions programmable	
ACCESSORIES			
Included	Power cord x 1, VGA cable x 1, IR remote control x 1, Batteries, Setup manual x 1, Clamp and screw x 1, Wall mount adapter x 4, Wall mount adapter screw x 4, microSD card slot cover and screw x 1, CD-ROM x 1		

Dimensions

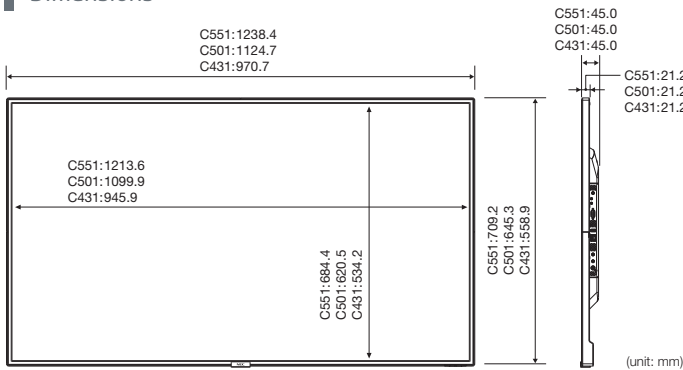

Options



Stand
ST-401

Local options: please contact your supplier.



External Sensor Kit
Ambient light
IR remote
KT-RC2



Wireless MultiPresenter
Stick
MP10RX

NEC is a registered trademark of NEC Corporation.

MultiSync, NaViSet and MultiPresenter are trademarks or registered trademarks of NEC Display Solutions, Ltd. in Japan, the United States and other countries.

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.

DisplayPort and DisplayPort Compliance Logo are trademarks owned by the Video Electronics Standards Association in the United States and other countries.

PJLink trademark is a trademark applied for registration or is already registered in Japan, the United States of America and other countries and areas.

CRESTRON and CRESTRON ROOMVIEW are trademarks or registered trademarks of Crestron Electronics, Inc.

AMX is a trademark or registered trademark of AMX in the United States and other countries.

VESA is a trademark of a nonprofit organization, Video Electronics Standard Association.

microSD is a trademark of SD-3C, LLC.

Windows is a registered trademark of Microsoft Corporation.

All other trademarks are the property of their respective owners.

The images in this brochure are samples.

All specifications are subject to change without notice. October 2017

