

Large-Screen LCD

Orchestrating a brighter world

**NEC**

NEC Large Format Touch LCD Displays

*MultiSync*<sup>®</sup> V554-T / V484-T / V404-T




# Impressive touch solutions have never been easier to create.

Drive your ambition beyond the limits of a passive video wall to achieve high-performance multi-touch capabilities with the NEC touch system.

## Highlights


### An Attractive Screen that is Scratch Resistant and Limits Background Reflections from External Light

The screen employs a one-sided anti-glare coating with smooth finger-sliding and a 4.0-mm thick glass to protect from scratches and impacts. Furthermore, the high luminance of 440 cd/m<sup>2</sup> provides a readable display even in bright locations.



### Up to 10-point Multi-touch Gesture Support Allows Operations from Multiple Users

The display employs an infrared touch panel that allows multiple inputs, so it can be used by multiple users. The display can even be used while wearing gloves.



\*An application that supports multiple inputs is required.

### Modern and Slim Design

The new elegant slim design provides unobtrusive integration into any application and environment. The simplicity of its shape supports an unhindered viewing experience ensuring that the screen content is the prevalent factor. Its reduced depth means that access to buildings and integration within interior design is straightforward and hassle-free.

### Out of the Box Signage Solution

The integrated media player supports easy content playback and management for out-of-the box signage solutions that could not be simpler. Content can be transferred through the USB interface or a network connection.

### Smart Expansion

A modular open platform approach is the smartest way to deliver tailor-made signage solutions, where scalable computing power such as Raspberry Pi compute modules or OPS\* slot-in PCs are seamlessly embedded into the display.



OPS\* slot




Compute module  
Requires the optional interface kit

\* OPS is a standard established by Intel Corporation.

### SpectraView® Engine Precisely Recreates Colours with High Precision


The display can reproduce colours more accurately because it is equipped with a 3D lookup table and unique colour conversion algorithm through its dedicated image processing. Various colour gamuts can be expressed precisely according to sRGB and other industry standards without calibration of each image-quality setting. In addition, display settings designed for different applications are preset at the factory as "Picture Mode" settings, so you can use a setting quickly by selecting it from the menu.



3D lookup table

### Support for MultiProfiler® Software to Easily Realize Various Emulation Functions

The display supports MultiProfiler®, NEC's unique application software. Applying an ICC profile\* to the display easily enables advanced colour reproduction, and you can also create and save ICC profiles for displays that require colour management.

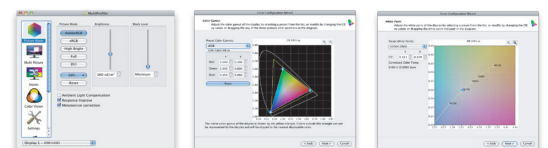

\* ICC profile: A file established by the International Color Consortium (ICC) that lists the colour gamut of the device to determine how a specific device reproduces colour. Files can be created for three main device types: displays, input devices (digital cameras, scanners, etc.) and output devices (printers, etc.).



### Advanced Heat Management

Monitoring and managing the temperature of each display is crucial to secure reliability and longevity. An industrial-strength, premium-grade panel with additional thermal protection, internal temperature sensors with self-diagnostics, and fan-based technology allow for 24/7 operation and protect your display investment.

### Intelligent Wireless Data Function

The built-in near field communication (NFC) chip allows data to be read and written via a mobile phone or tablet PC. Users can significantly reduce installation costs as displays can be easily configured and serviced using the NEC NFC Android app. This is available even when the display is switched off and is especially useful on larger installations.



### HDBaseT Support\*

Simplify your installations with HDBaseT, which is optimized for video applications and supports uncompressed Full-HD digital video, audio, Ethernet, and various control signals. With only a single cable (up to 100 m) to run, infrastructure and labour costs are reduced, installations are significantly easier, and there is no cable clutter to manage. With uncompressed HD video support, images have never been more stunning. What's more, control signals are contained in the same cable.



\* Requires the optional HDBaseT board, SB-07BC

### Proof of Play

This function provides accurate proof that displays are working as established and is helpful when checking on the status of the displays installed at a user's site.

## Other Useful Features and Functions

- Landscape/portrait capable
- Scheduler with real-time clock
- Intelligent power management system
- Power-on delay
- Screen saver function
- Aspect ratio control
- Memo function
- Carbon footprint meter
- Image and on-screen display flip
- Picture-in-picture, picture-out-picture
- Built in speakers
- Point zoom
- Control lock function
- 6-axis colour adjustments and sRGB standard
- Advanced video settings (Noise reduction, adaptive contrast)
- Colour temperature adjustment
- Programmable gamma setting (3 settings)
- DICOM simulation

- Plug and play (DDC/CI, DDC2B)
- HDCP (High-bandwidth Digital Content Protection)
- Ethernet and RS-232C control and communication
- CRESTRON ROOMVIEW™
- AMX Discovery HTTP server
- PJLink
- Self-diagnosis


- Status log function
- Firmware update over LAN
- Rear metal cabinet with VESA Standard (FDMIv1) Mounting Interface

### Human Sensor and Advanced Auto Dimming

This optional human (motion) sensor accessory (KT-RC2) helps to deliver creative digital signage to end users by allowing for dynamic control of brightness, audio and source inputs while saving on operating costs. Built-in auto dimming adjusts the backlight of the LCD automatically depending on the amount of ambient light.



#### Practical example

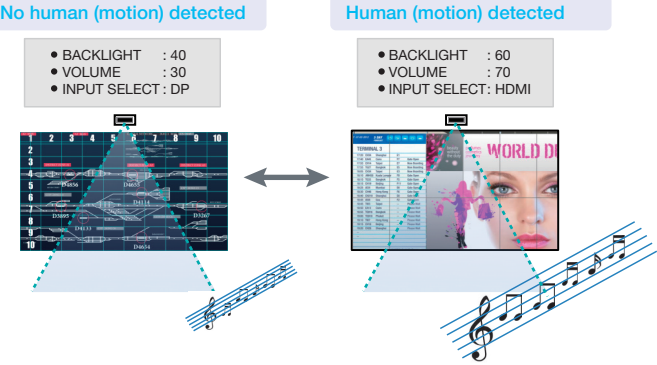

### NaViSet® Administrator 2

This software is an all-in-one remote support solution that runs from a central location and provides monitoring, asset management and control of the majority of NEC display devices and Windows computers. It is ideal for multi-device installations over larger infrastructures.



### Dedicated Colour Calibration Software\*

As the brightness and colour temperature of the LCD change with time, colours may not match across multiple screens. Our dedicated colour calibration software ensures colour uniformity and fidelity across multiple screens, creating a perfectly matched image in tiled environments.

\* NEC Display Wall Calibrator




Specifications


MODEL	V554-T	V484-T	V404-T
<b>LCD MODULE</b>			
Viewable size (diagonal)	55" / 1,387.8 mm	48" / 1,209.4 mm	40" / 1,016.1 mm
Active screen area (W x H)	1,209.6 x 680.4 mm	1,054.1 x 592.9 mm	885.6 x 498.2 mm
Panel technology	IPS	SVA	
Native resolution	1,920 x 1,080		
Brightness (maximum @25°C)	440 cd/m <sup>2</sup>		
Contrast ratio (typical)	1,200:1 (Native contrast)	4,000:1 (Native contrast)	
Viewing angle [°]	178 horizontal / 178 vertical (at CR>10)		
Response time (typical)	8 ms (G to G)		
Backlight	Edge LED backlight		
<b>CONNECTIVITY</b>			
Input terminals	DisplayPort	DisplayPort x 2	
	HDMI	HDMI x 2	
	DVI	DVI-D x 1	
	VGA	Mini D-sub 15 pin x 1	
	Video	RCA x 1	
Output terminals	Audio	Digital: HDMI x 2, DisplayPort x 2, Analogue: 3.5 mm stereo mini jack x 2	
	DisplayPort	DisplayPort x 1	
External control	RS232C	3.5 mm stereo mini jack x 1	
	Ethernet	D-Sub 9 pin x 1	
	Remote in	RJ-45 10BASE-T / 100BASE-TX x 2 (In/out)	
USB hub	Upstream	3.5 mm stereo mini jack x 1	
	Downstream	Possible via Ethernet	
	Power supply	Mini D-sub 15 pin / DVI-D	
	Media player	USB Type B x 1	
	Service	USB Type A x 1	
Option slots	Expansion slots		
Speaker output	External speakers	Open pluggable specification (NEC / Intel OPS standard) x 1, micro SD card x 1, interface extension x 1	
	Internal speakers	15 W + 15 W (8 Ω) 10 W + 10 W	
<b>POWER</b>			
Power requirement (100 – 240 V)	3.3 – 1.4 A	2.7 – 1.1 A	2.7 – 1.1 A
Power consumption (typical)	110 W	85 W	75 W
Power consumption (standby mode)		0.5 W	
<b>PHYSICAL SPECIFICATIONS</b>			
Bezel width	33.4 mm		
Dimensions (without stands: W x H x D)	1,278.6 x 749.4 x 85.9 mm	1,122.9 x 661.7 x 77.7 mm	954.4 x 567.0 x 77.7 mm
Dimensions (with stands: W x H x D)	1,278.6 x 782.1 x 267.7 mm	1,122.9 x 693.0 x 267.7 mm	954.4 x 598.3 x 267.7 mm
Packaging dimensions (W x H x D)	1,475 x 972 x 281 mm	1,305 x 850 x 250 mm	1,120 x 745 x 224 mm
Net weight (without stands)	39.0 kg	28.5 kg	22.7 kg
Gross weight (with box)	49.9 kg	37.0 kg	29.4 kg
VESA compatible mounting interface	300 x 300 mm (M6, 4 holes)		
Supported orientations	Landscape, Portrait		
<b>ENVIRONMENTAL CONDITIONS</b>			
Operating temperature	0°C to 35°C		
Operating humidity	20% to 80% (without condensation)		
<b>Touch Panel</b>			
Detection method	IR scanning method		
Operating system	Windows 7, Windows 8, Windows 8.1, Windows 10		
Multi-touch	More than 2 touches with Windows 7 (limited accuracy) or later		
Protective glass	Tempered 4 mm glass with anti-glare coating		
	Transparency	More than 88%	
	Surface hardness	6 H	
Impact resistance*	130 cm		
<b>ACCESSORIES</b>			
Included	Power cord, DVI-D cable, USB cable, IR remote control, batteries, setup manual, clamp and screw x 1, wall mount adapter sleeve x 4, wall mount screw x 4, SD-card cover and screw x 1, CD-ROM		

\* The distance of a steel ball (weight: 500 g) in one free fall without breaking.

Dimensions

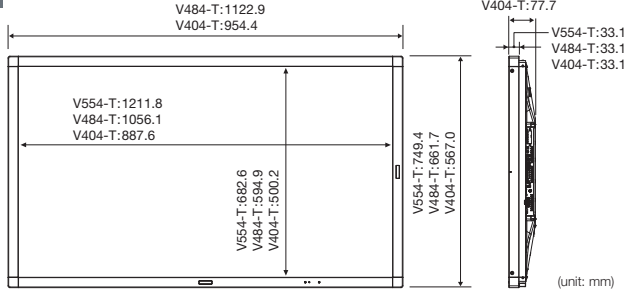

Terminals

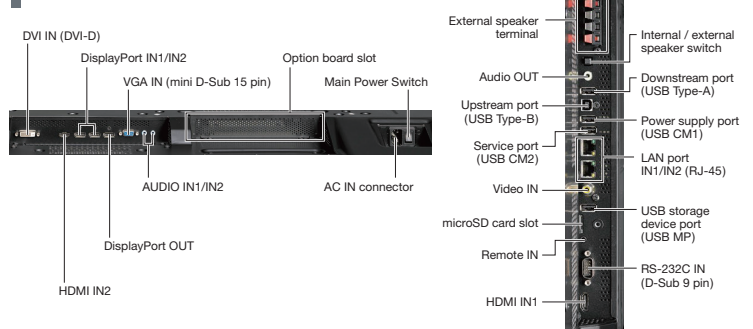

Options

	Slot Board							Raspberry Pi Interface Kit	Sensor Kit Human (Motion), ambient light IR remote	Speaker	Stand	Wireless MultiPresenter Stick
	OPS-Single Board Controller (Computer)	HDBaseT	HDMI and DisplayPort	SDI								
	Core i5 60GB-SSD	Core i5 320GB-HDD		Quad-SDI	3G-SDI	HD-SDI						
V554-T												
V484-T	N8000-8866	N8000-8865	SB-07BC	SB-08DC*	SB-09HC*	SB-04HC	SB-01HC	DS1-IF10CE	KT-RC2	SP-TF1	ST-401	MP10RX
V404-T												

Local options: please contact your supplier. \* These optional products will be usable with the main unit after an update of the main-unit firmware. The timing of the main-unit firmware update has not been determined.

NEC is a registered trademark of NEC Corporation. MultiSync, NaViSet and MultiProfiler are trademarks or registered trademarks of NEC Display Solutions, Ltd. in Japan, the United States and other countries. SpectraView is a trademark or registered trademark of NEC Display Solutions, Ltd. in the United States and other countries. MultiPresenter is the trademark of NEC Display Solutions, Ltd. in Japan, and other countries. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. DisplayPort and DisplayPort Compliance Logo are trademarks owned by the Video Electronics Standards Association in the United States and other countries. Trademark P.J.Link is a trademark applied for trademark rights in Japan, the United States and other countries and areas. HDBaseT™ and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance. Raspberry Pi is a trademark of the Raspberry Pi Foundation. CRESTRON and CRESTRON ROOMVIEW are trademarks or registered trademarks of Crestron Electronics, Inc. AMX is a trademark or registered trademark of AMX in the United States and other countries. VESA is a trademark of a nonprofit organization, Video Electronics Standard Association. Android is a trademark of Google Inc. microSD is a trademark of SD-3C, LLC. Windows is a registered trademark of Microsoft Corporation. Adobe® is a registered trademark of Adobe Systems Incorporated in the United States and other countries. All other trademarks are the property of their respective owners. The images in this brochure are samples. All specifications are subject to change without notice. May 2017